

## Technical data sheet

Ethernet · Unmanaged E-CO Switch, 5-Port, 10/100/1000 MBit/s

---

**QoS - Quality of Service, PROFINET Conformance Class A**

**5 RJ45 ports 1 GBit/s, compact design, energy management, ESD 6 kV**

**Redundant supply, extended temperature range, Jumbo Frames up to 9 kB**



---

### Identification

---

Type ET-SWGU5E  
Part No. [772013](#)

---

### Product version

---

Datasheet version 02

---

### Communication

---

Standard	IEEE 802.3 Ethernet, IEEE 802.3u Fast Ethernet, IEEE 802.3ab Gigabit Ethernet IEEE 802.3x Full-Duplex Flow Control IEEE 802.3az Energy Efficient Ethernet (EEE) IEEE 802.1p Class of Service IEC 60068-2-32 (free fall), IEC 60068-2-27 (shock), IEC 60068-2-6 (vibration)
LAN	10/100/1000 Base-T RJ45 Auto-MDI/MDI-X, Auto Negotiation
Cable length (segment)	Max. 100 m
Transfer rate	max. 1000 Mbit/s
Connection technology (data)	5 × RJ45 7.4 Mpps @ 64 bytes
Status display communication	System: Power 1 (P1): green Power 2 (P2): green Alarm, (Fault): red Per 10/100TX RJ45 Ports: 10/100 LNK/ACT: green 100/1000 LNK/ACT: orange (/amber) Store-and-Forward
Jumbo Frame	9K

---

#### United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park  
Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU  
Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2  
www.lutze.com • sales.gb@lutze.co.uk

#### Germany: Friedrich Lütze GmbH

Postfach 12 24 (PLZ 71366) • Bruckwiesenstraße 17-19 • D-71384 Weinstadt  
Tel. +49 (0)7151 6053-0 • Fax +49 (0)7151 6053-277(-288)  
www.luetze.de • info@luetze.de

21.04.2022 • Subject to technical modification

Part No. [772013](#) • Datasheet version: 02

page 1 of 3



SYSTEMATIC TECHNOLOGY

## Technical data sheet

### Ethernet · Unmanaged E-CO Switch, 5-Port, 10/100/1000 MBit/s

---

	1 Mbit/s
Source Address Table	2K inputs, automatic source address learning and aging
FLOW Source	EEE 802.3x pause frame for full-duplex Back pressure for half-duplex
Switch Fabric	10 Gbps (non-blocking)

---

#### Safety

---

ESD (Ethernet)	DC 6 kV
Surge (EFT for power)	DC 4 kV
Reverse voltage protection	Yes

---

#### Monitoring

---

Error output	Relay, 1 NO contact - 1 A @ DC 24 V
Switching current	1 A @ DC 24 V
Switching voltage	AC 120 V / DC 28 V
Isolation voltage	DC 500 V

---

#### General

---

Rated voltage $U_N$	DC 9 – 48 V redundant, AC 24 V
Nominal voltage range	7 V – 52 V
Rated current	3.6 W, DC: max. 0.17 A, AC: max. 0.15 A
Degree of protection	IP30
Relative humidity (operation)	5 % – 90 % (non-condensing)
Relative humidity (storage)	0 % – 90 % (non-condensing)
Housing material	Metal
Mounting	DIN rail mountable TS35 (EN 60715) Wall mounting
Installation position	Any
Connection type	6-pole pluggable screw terminal for power supply and fault diagnosis single wire/fine wire 0.25 mm <sup>2</sup> – 2.5 mm <sup>2</sup> AWG 20 – AWG 14 fine stranded wire with ferrule 0.25 mm <sup>2</sup> – 1.5 mm <sup>2</sup> AWG 20 – AWG 16
MTBF	>100000 h
Dimensions (w × h × d)	30.0 mm × 104.0 mm × 70.0 mm
Weight/unit	0.252 kg
PU (units)	1

---

#### General ambient conditions

---

Operation temperature range	-40 °C ... +75 °C
Storage temperature range	-40 °C ... +75 °C

---


# Technical data sheet

Ethernet · Unmanaged E-CO Switch, 5-Port, 10/100/1000 MBit/s

## Certifications/Standards


Certifications	CE FCC Part 15 Class A UKCA cULus (E332878)
Standards	EN 55032 EN 55035 IEC 61000-4-2/3/4/5/6/8 IEC 60068-2-27 IEC 60068-2-32 IEC 60068-2-6

## Dimensions

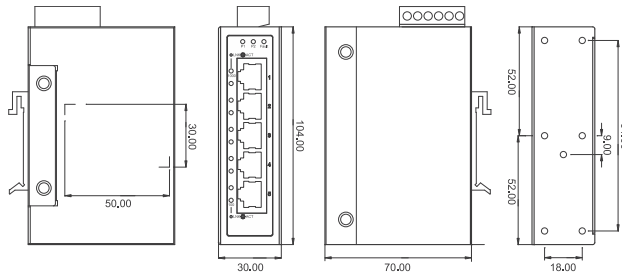

## PIN assignment

Max. fault loading: 24V, 1A



## LED status

Anzeige Display Affichage	Farbe Color Couleur	Typ Type	Beschreibung Description Description
P1 ○ ○ ●	grün green vert	Power 1	grün an green on allumée en vert PWR 1 ist angeschlossen PWR 1 is connected Le PWR 1 est connecté
	grün green vert	Power 2	grün an green on allumée en vert PWR 2 ist angeschlossen PWR 2 is connected Le PWR 2 est connecté
	rot red rouge	Fault	rot an red on allumée en rouge Die AC- oder DC-Spannung hat einen Fehler. The AC or DC voltage has an error. La tension AC ou DC présente une erreur.
1000 ○ LNK ○ ACT	grün green vert	1000 LINK/ACT	grün an green on allumée en vert Der Port arbeitet mit 1000 Mbps The port works with 1000 Mbps Le port fonctionne avec 1000 Mbps
		1000 LINK/ACT	grün blinkt green flashes clignotements vert Der Port empfängt oder sendet Daten The port is actively sending or receiving data Le port reçoit ou envoie des données
100 ○ LNK ○ ACT	orange orange orange	100 LINK/ACT	orange an orange on allumée en orange Der Port arbeitet mit 10/100 Mbps The port works with 10/100 Mbps Le port fonctionne avec 10/100 Mbps
		100 LINK/ACT	orange blinkt orange flashes clignotements orange Der Port empfängt oder sendet Daten The port is actively sending or receiving data Le port reçoit ou envoie des données